



Specification Sheet

Genesis 60D Acoustic Insulation

A proven, highly efficient sound absorbing product, due to its density & structure. The panels are flexible / semi-rigid & can be used on flat or slightly curved surfaces for acoustic & thermal insulation. It is chemically neutral & will not cause or promote corrosion. It is biologically inert, it is unaffected by vermin & does not encourage the growth of fungi, moulds or bacteria.

Specifications


- Non-flammable
- Density: 60kg/m³
- Thermal: 0.04 k-value W/Mk
- Panel size: 1000 x 600mm / 1200 x 600mm
- Thickness: 50mm

Sound Absorption Coefficient (NRC Val 0.95)				
125hz	250hz	500hz	1000hz	2000hz
0.22	0.63	0.9	0.98	1.05


Applications

- In drywall & brick wall cavities
- Over ceilings


ACOUSTICALLY INSULATED DOUBLE BRICK WALL

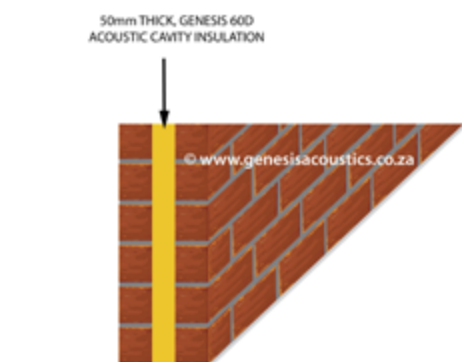

SOUNDPROOFING A BRICK WALL

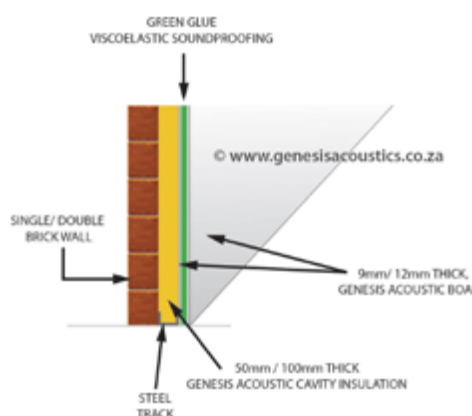

SOUNDPROOFING A SIMPLE CEILING

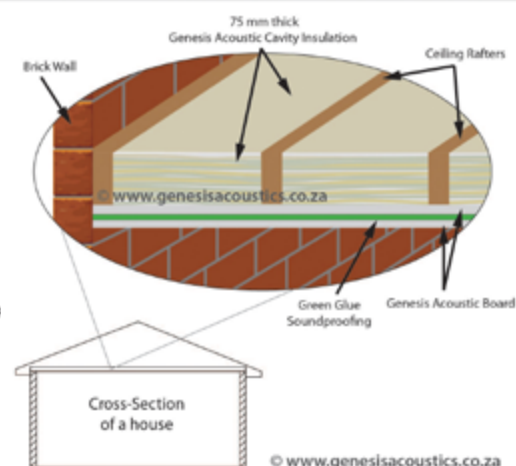

Lead Time & Delivery

- Product can normally be delivered within 3 - 5 working days from date of order.
- We deliver to any major center, price is determined by quantity & destination.